


Promat® TOPCOAT 200

Acrylic Polymer Coating

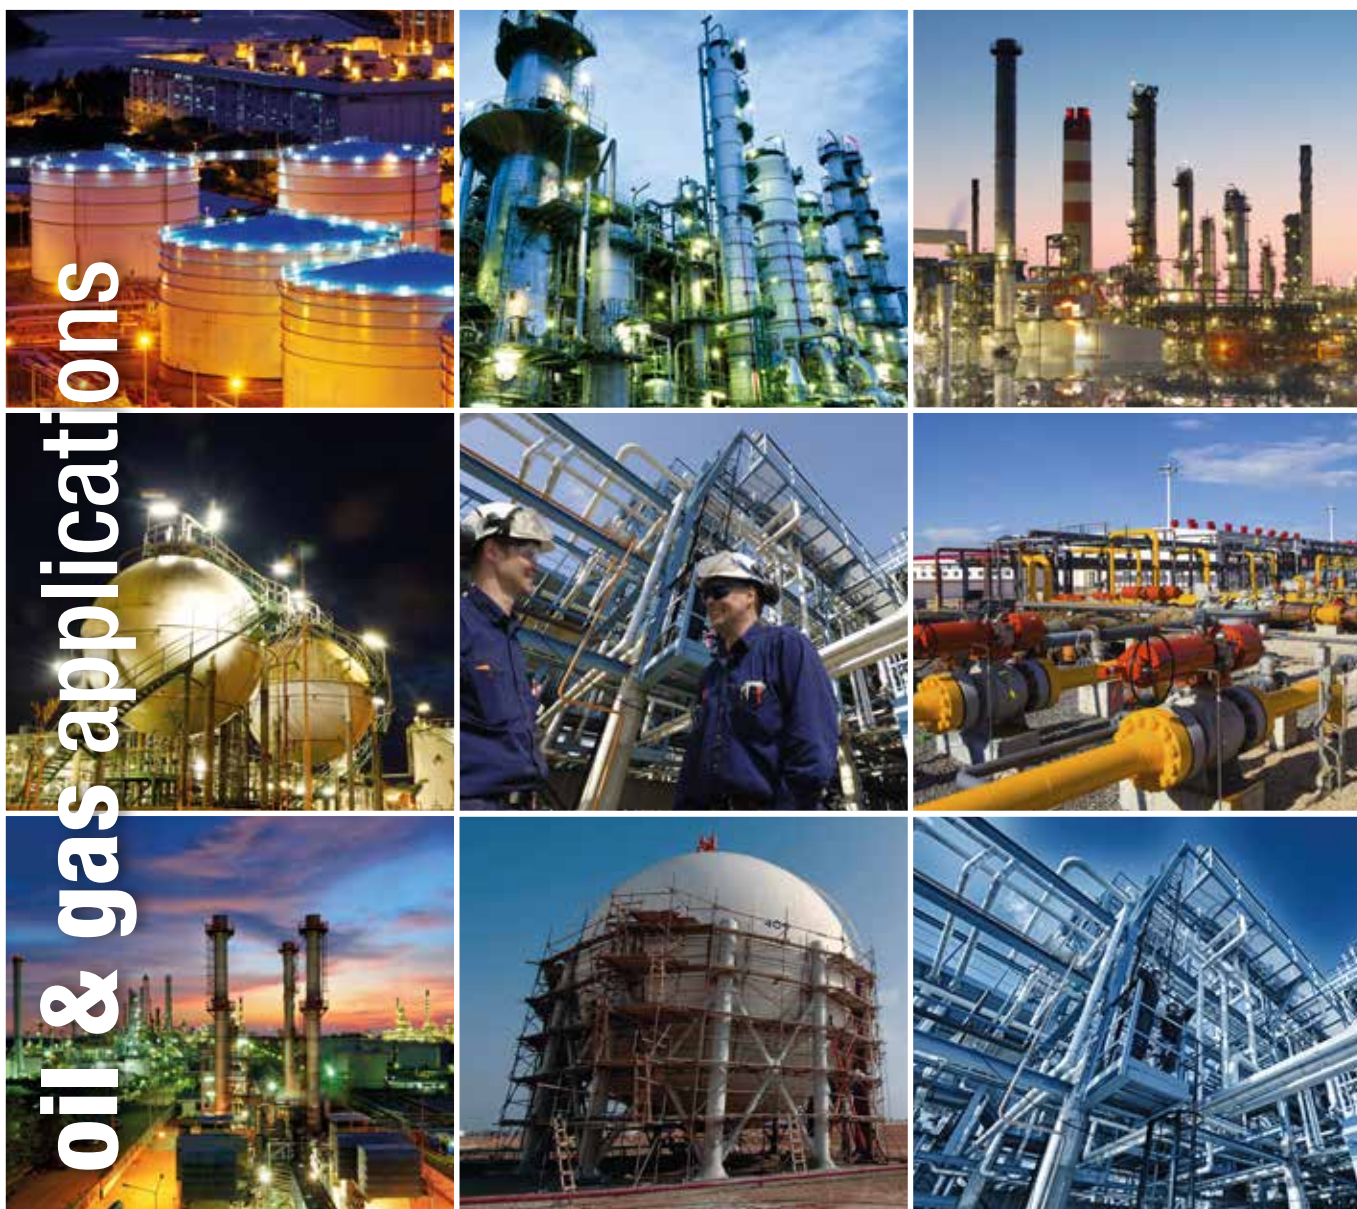

oil & gas applications

QUALITY ASSURANCE

Promat products are manufactured to stringent quality control systems to assure that our customers receive materials made to the highest standards.

Operating to these standards means that all activities, which have a bearing upon quality, are set out in written procedures.

Systematic and thorough checks are made on all materials and their usage. Test equipment is subjected to regular checks and is referred back to national standards.

The information given in this data sheet is based on actual tests and is believed to be typical of the product. No guarantee of results is implied however, since conditions of use are beyond our control.

INTRODUCTION

Promat® TOPCOAT 200 is a single pack, water based acrylic polymer for use as a water vapour permeable topcoat with excellent adhesion. It may be applied by spray, roller or brush.

Promat® TOPCOAT 200 is applied over vermiculite and Portland cement based fire resistant coatings that protect steel and concrete substrates against ingress from salt spray, washdown water, chemical spills, rainfall and sprinkler deluge systems.

Promat® TOPCOAT 200 may also be used on masonry, brickwork and blockwork, whether dry or damp.

PROPERTIES AND PERFORMANCES

Colour and finish	Matt white or grey Please contact Promat for other colours
Thickness per coat	150-200 microns wet film thickness (WFT) 68-90 microns dry film thickness (DFT)
Practical coverage	Dependent on surface texture, substrate porosity, application method and technique
Theoretical coverage	6.7m ² /litre at 150 microns WFT 5.0m ² /litre at 200 microns WFT
Number of coats	Normally two coats. It is recommended that the first coat is a different colour from the second coat for identification purposes
Cure	By air drying
Drying time	Touch dry ½ to 1 hour at 20°C and 50% RH Fully dry 2 to 6 hours at 20°C and 50% RH Varies with ambient conditions, but high humidity, low temperature and low air change will hinder cure significantly
Water vapour transmission	25g/m ² over 24 hours for 150 microns tested to BS 3177: 1959
Surface spread of flame	Class 1 to BS 476: Part 7 on non-combustible substrates
Volume of solids	45%
Weight	1.4kg/litre

ADVANTAGES

- Promat® TOPCOAT 200 does not blister when used on steel and concrete substrates because of its water vapour permeability
- Flexible, flame retardant, mould resistant, and helps reduce the carbonation rate of cement based products.

PREPARATION

Typical substrates	Concrete, sand-cement renders, masonry and Promat cementitious fire protective coatings
Substrate preparation	Surfaces to be coated must be free from oil, grease, visible moisture (including condensation), dirt, dust and mould. Promat cementitious coatings should be surface dry before the application of Promat® TOPCOAT 200

APPLICATION

Methods	Stir Promat® TOPCOAT 200 before use (do not thin) and apply with an industrial type airless spray or lambswool roller. The latter is not recommended on heavily textured surfaces. Promat® TOPCOAT 200 may also be applied with a wide nylon or bristle brush in small (maximum 1m ²) areas only
Limitations	Promat® TOPCOAT 200 may be applied when the substrate and air temperatures are at least 5°C and rising. Maximum air and substrate temperature is 40°C. Substrate temperature should be at least 2°C above dew point temperature. Protect from rain, hail etc until dry.

PACKAGING

25 litre metal pails.

STORAGE

Protect from frost, excessive heat (above 45°C) and strong radiant sunlight.

SHELF LIFE

Maximum 12 months in original sealed containers.

ENVIRONMENTAL

Do not discharge into drains, watercourses or soil.

HEALTH AND SAFETY

Adequate ventilation must be provided during use. Avoid contact with the skin and eyes by using eye protection, gloves, barrier cream and a face mask.

If the product comes into contact with the skin, wash immediately with soap and water. If the eyes are affected, flush with plenty of water and seek medical attention immediately.

A safety data sheet is available from Promat upon request.

Promat activities are conducted with due regard to all statutory requirements with appropriate safeguards against exposing employees and the public to health and safety risks.

HEAD OFFICE BELGIUM

Promat International N.V.

Bormstraat 24
2830 Tiselt
Tel: +32 15 718 100
Fax: +32 15 718 109
Email: info@promat-international.com
www.promat-international.com
www.promat-tunnel.com
www.promat-marine.com
www.promat-oilandgas.com

ASIA PACIFIC HEADQUARTERS, MALAYSIA

Promat International (Asia Pacific) Ltd.

Unit 19-02-01 -Level 2 PNB Damansara
No.19 Lorong Dungun - Damansara Heights
50490 Kuala Lumpur
Tel: +60 3 2095 5111
Fax: +60 3 2095 6111
Email: info@promat-ap.com
www.promat-ap.com

AUSTRALIA

Promat Australia Pty. Ltd.

1 Scotland Road
SA 5031 Mile End South
Tel: 1800 Promat (776 628)
Fax: +61 8 8352 1014
Email: mail@promat.com.au
www.promat-ap.com

AUSTRIA

Promat GmbH

St.-Peter-Straße 25
4021 Linz
Tel: +43 732 6912 0
Fax: +43 732 6912 3740
Email: info@promat.at
www.promat.at

Promat GmbH

IZ NÖ-Süd, Straße 16, Objekt 69
1. OG, Top 2
LKW Walter Business Park
2355 Wiener Neudorf
Tel: +43 2236 660915
Fax: +43 669070
Email: office@promat.at
www.promat.at

CHINA

Promat China Ltd.

Room 506, Block A, Qi Lin Plaza
13-35 Pan Fu Road
510180 Guangzhou
Tel: +86 20 8136 1167
Fax: +86 20 8136 1372
Email: info@promat.com.cn
www.promat.com.cn

CZECH REPUBLIC

Promat s.r.o.

Ckalova 22/784
16000 Praha 6 - Bubeneč
Tel: +420 2 2439 0811
Fax: +420 2 3333 3576
Email: promat@promatpraha.cz
www.promatpraha.cz

DENMARK

Promat Nordic

Kometvej 36
6230 Rødokro
Tel: +45 7020 0482
Fax: +45 7466 1020
Email: info@promat.nu
www.promat.nu

FRANCE

Promat S.A.S.

BP 66 Rue de L'Ammandier
78540 Vernouillet
Tel: +33 1 3979 6160
Fax: +33 1 3971 1660
Email: info@promat.fr
www.promat.fr

GERMANY

Promat GmbH

Scheifenkamp 16
40878 Ratingen
Tel: +49 2102 493 0
Fax: +49 2102 493 111
Email: mail@promat.de
www.promat.de

HONG KONG

Promat International (Asia Pacific) Ltd.

Room 1010, C.C. Wu Building
302-308 Hennessy Road, Wanchai
Tel: +852 2836 3692
Fax: +852 2834 4313
Email: apromath@promat.com.hk
www.promat.com.hk

INDIA

Promat (Malaysia) Sdn. Bhd. (India Representative Office)

610-611, Ansal Imperial Tower
C-Block, Community Centre
Naraina Vihar, Naraina
110028 New Delhi
Tel: +91 11 2577 8413
Fax: +91 11 2577 8414
Email: info-india@promat-asia.com
www.promat-ap.com

ITALY

Promat S.p.A.

Corso Paganini 39/3
16125 Genova
Tel: +39 010 248 8411
Fax: +39 010 213 768
Email: info@promat.it
www.promat.it

MALAYSIA

Promat (Malaysia) Sdn. Bhd.

Unit 19-02-01 - Level 2 PNB Damansara
No.19 Lorong Dungun
Damansara Heights
50490 Kuala Lumpur
Tel: +60 3 2095 8555
Fax: +60 3 2095 2111
Email: info@promat-ap.com
www.promat-ap.com

NETHERLANDS

Promat B.V.

Vleugelboot 22
3991 CL Houten
PO Box 475
3990 GG Houten
Tel: +31 30 241 0770
Fax: +31 30 241 0771
Email: info@promat.nl
www.promat.nl

POLAND

Promat TOP Sp. z o.o.

ul. Przeclawska 8
03 879 Warszawa
Tel: +48 22 212 2280
Fax: +48 22 212 2290
Email: top@promatop.pl
www.promatop.pl

RUSSIA

Promat A+B

Repräsentanz - ul. Kantemirovskaya 58
115477 Moscow
Tel: +7 495 325 4268
Fax: +7 495 231 7977
Email: gd@promat.ru
www.promat.ru

SINGAPORE

Promat Building System Pte. Ltd.

10 Science Park Road
#03-14 The Alpha - Singapore Science Park II
117684 Singapore
Tel: +65 6776 7635
Fax: +65 6776 7624
Email: info@promat.com.sg
www.promat-ap.com

SOUTH EAST EUROPE

Promat SEE

Samoborska cesta 91 A,
10 090 Zagreb, Croatia
tel: +385-21-218294
fax: +385-21-218295
mob: +385-99-202 8000
Email: marine@promat-see.com

SOUTH KOREA

Promat International (Asia Pacific) Ltd.

(Korea Branch Office)
Room 406, 811-2 - Yeoksam-dong Gangnam-gu
135080 Seoul
Tel: +82 70 7794 8216
Email: apromath@promat.com.hk
www.promat-ap.com

SPAIN

Promat Ibérica S.A.

C/Velazquez, 47 - 6° izda
28001 Madrid
Tel: +34 91 781 1550
Fax: +34 91 575 1597
Email: info@promat.es
www.promat.es

SWITZERLAND

Promat AG

Stationsstrasse 1
8545 Rickenbach-Sulz
Tel: +41 52 320 9400
Fax: +41 52 320 9402
Email: office@promat.ch
www.promat.ch

UNITED ARAB EMIRATES

Promat Fire Protection LLC

Plot no. 597-921, Dubai Investment Park 2
PO Box 123945, Dubai
Tel: +971 4 2 32 9780
Fax: +971 4 232 9781
www.promatfp.ae

UNITED KINGDOM

Promat UK Ltd.

The Sterling Centre, Eastern Road, Bracknell
RG12 2TD Berkshire, Great Britain
Tel: +44 1344 381 300/400
Fax: +44 1344 381 301
Email: marketinguk@promat.co.uk
www.promat.co.uk

USA

Promat Inc.

1731 Fred Lawson Drive
TN 37801 Maryville
Tel: +1 865 681 0155
Fax: +1 865 681 0016
Email: sales@promat.us
www.promat.us